

GENERAL FEATURES

.HIGH IMPACT DOME
 .B/W CCD 1/3" FORMAT
 .LOW POWER CONSUMPTION
 .0.02 LUX FOR LOW LIGHT APPLICATIONS
 .BUILT IN ELECTRONIC AUTO IRIS
 .HIGH RESOLUTION

.INTERNAL SYNCHRONIZATION
 *CVC-3805TP/W
 .VARIFOCAL LENS (4mm-9mm)
 *CVC-385TP/W
 .3.6mm 92 deg

DESCRIPTION


1 HIGH IMPACT DOME

VANDAL RESISTANT DOME CAMERA CAN WITHSTAND A STRIKE FROM A 10 lb. SLEDGE HAMMER.

2 LOCKING SCREW

TO OPEN THE DOME COVER, LOOSEN THE TAMPER RESISTANT LOCKING SCREW BY USING THE INCLUDED SPECIAL ALLEN KEY. ONCE LOOSENED, ROTATE THE DOME COVER COUNTER-CLOCKWISE TO REMOVE.

3 ADJUSTING BRACKET

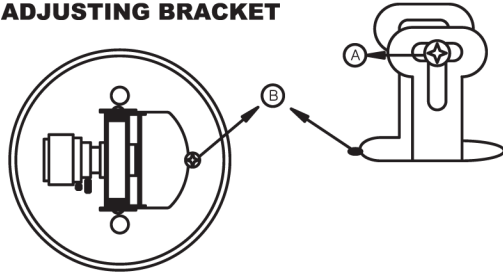

(A) LOOSEN SCREW AND ADJUST BY SHIFTING UP & DOWN. TIGHTEN THE SCREW TO SET.

(B) LOOSEN SCREW AND ADJUST BY SHIFTING LEFT & RIGHT. TIGHTEN THE SCREW TO SET.

1

2

3

INSTALLATION


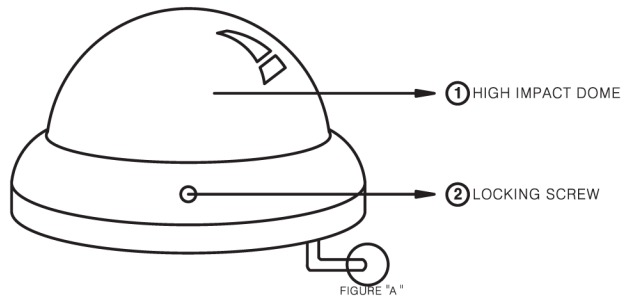


FIGURE "A"
 RED:DC 12V INPUT
 YELLOW:VIDEO OUT
 DIMENSIONS:5.1"(W) • 3.3"(H) • 5.1"(D) (130mm(W) • 85mm(H) • 130mm(D))

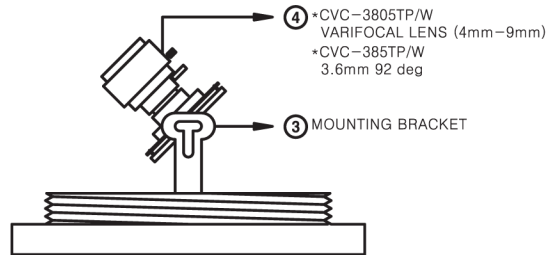

4 *CVC-3805TP/W
 VARIFOCAL LENS (4mm-9mm)
 *CVC-385TP/W
 3.6mm 92 deg

3 MOUNTING BRACKET

4 *CVC-3805TP/W VARIFOCAL LENS (4mm-9mm)

ADJUST BETWEEN T ←→ W (TELE ←→ WIDE) TO SET THE ANGLE. (FOCAL LENGTH)
 SET THE FOCUS BY ADJUSTING ∞ ←→ N.

NOTE: BOTH OF THE ABOVE ADJUSTMENTS GET LOCKED INTO POSITION THROUGH THE USE OF "LOCKING HANDLES".

*CVC-385TP/W 3.6mm 92 deg

5 POWER SUPPLY 12 VOLTS DC, 2WATT

SPECIFICATIONS

MODEL NO	CVC-3805TP/W	CVC-385TP/W
IMAGE SENSOR	1/3" CCD AREA SENSOR	
TV SYSTEM	EIA	
NO. OF PIXELS	510(H) • 492(V)	
SCANNING SYSTEM	525 LINES, 60 FIELD/sec	
SYNC SYSTEM	INTERNAL SYNC	
RESOLUTION	420 LINES	
MINIMUM ILLUMINATION	0.02 LUX	
S/N RATIO	MORE THAN 48db	
GAMMA CHARACTERISTIC	0.45	
VIDEO OUTPUT	1.0 Vp-p 75 ohm COMPOSITE	
ELECTRONIC SHUTTER	1/60 - 1/100,000 sec	
POWER SUPPLY	12V DC 300 ma	
POWER CONSUMPTION	120ma (TYPICAL)	
LENS	VARIFOCAL LENS (4mm-9mm)	3.6mm 92 deg
OPERATIONAL TEMPERATURE	-10 deg - +50 deg C RH95% MAX(14 deg F to 122 deg F)	
STORAGE TEMPERATURE	-20 deg - +60 deg C RH95% MAX(-4 deg F to 140 deg F)	
DIMENSIONS	5.1"(W) • 3.3"(H) • 5.1"(D) (130mm(W) • 85mm(H) • 130mm(D))	
WEIGHT	18 oz (500grs)	

THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.


PROVIDEO

speco technologies™

B/W VANDAL RESISTANT DOME CAMERA

CVC-385TP/W

CVC-3805TP/W

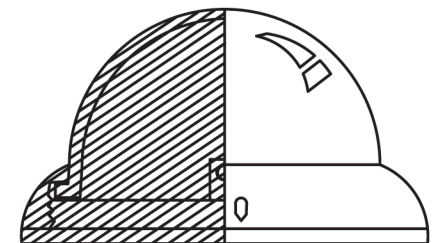

Speco Technologies

200 NEW HIGHWAY
 AMITYVILLE, N.Y. 11701
 1-800-645-5516 1-631-957-8700
 www.specotech.com